



- △ Hotel lighting wall washer spotlight with different fornt hole series.
- △ High purity lathe aluminum with meticulous treatment and finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Special fornt hole designs for focusing: big round, oval, small round.
- △ Deep anti-glare LED module, refelector colors: white, black, sliver.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(7W luminous intensity and lux distribution diagrams)

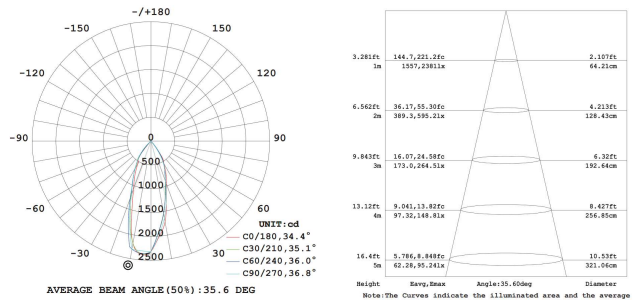


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL019007	Ø68x82mm	Ø55mm	7W	24°/36°	>0.90	>80/90	No	90-350VAC	650LM
CL-DL019012	Ø90x108mm	Ø70mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL019018	Ø110x123mm	Ø90mm	18W	24°/36°	>0.90	>80/90	No	90-350VAC	1700LM

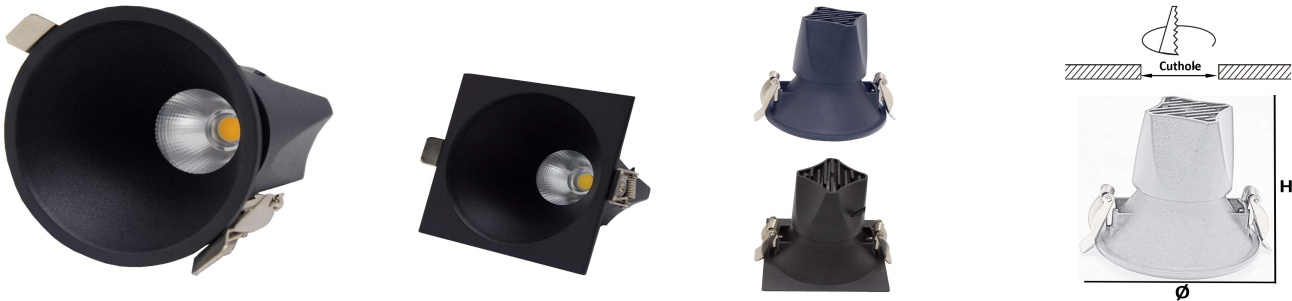

- △ Deep anti-glare high end ceiling spot light round and square fornt.
- △ High purity die casting aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Light designer COB optical lens gives outstanding focusing beam.
- △ Lovely appearance, narrow edge, round and square fornt optional.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(luminous intensity and lux distribution diagrams)

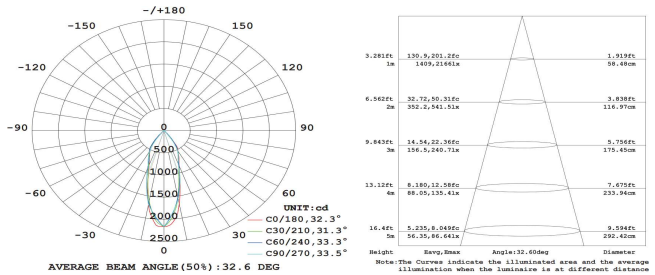

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL020012	Ø90x90mm	Ø70mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	110LM
CL-DL021012	90x90x90mm	Ø70mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	1100LM