



- △ Innovative and high end grille lights, one, two and three heads optional.
- △ United die casting front panel, thickening heat sink, perfect finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Double rings light head, to realise 360 degree rotatable projecting.
- △ Professional anti-glare optical reflectors ensure beautiful light output.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(7W luminous intensity and lux distribution diagrams)

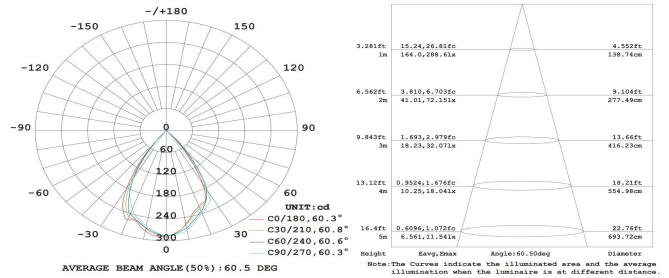


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL026007	125x125x85mm	105x105xmm	1X7W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	650Lm
CL-DL026014	225x225x85mm	205x105xmm	2X7W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	1300LM
CL-DL026021	310x125x85mm	290x105xmm	3X7W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	1950LM
CL-DL027018	150x150x115mm	130x130xmm	1X18W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	1700Lm
CL-DL027036	205x150x115mm	185x130xmm	2X18W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	3400Lm
CL-DL027054	305x150x115mm	285x130xmm	3X18W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	5100Lm



- △ Innovative and high end grille lights, one, two and three heads optional.
- △ United die casting front panel, thickening heat sink, perfect finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ 180 degree horizontal rotatable and 360 degree vertical rotatable.
- △ Professional anti-glare optical reflectors ensure beautiful light output.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(12W luminous intensity and lux distribution diagrams)

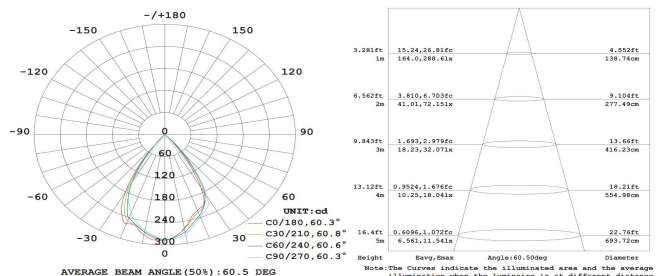

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL028012	Ø110x90mm	Ø90mm	1X12W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	1100Lm
CL-DL028024	190x105x115mm	170x85mm	2X12W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	2200Lm
CL-DL028036	275x105x115mm	255x85mm	3X12W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	3300Lm
CL-DL029024	Ø135x135mm	Ø115mm	1X24W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	2200Lm
CL-DL030036	Ø170x145mm	Ø150mm	1X36W	24°/36°/60°	>0.90	>80/90	No	90-350VAC	3300Lm