



- △ High end no screw design single arm COB LED track light series.
- △ High purity lathe aluminum body, plug-in-box driver, without screw.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Professional optical lens with reflector gives pure focusing beam.
- △ Smoothing and comfortable appearance, 2,3 and 4 steps optional.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(luminous intensity and lux distribution diagrams)

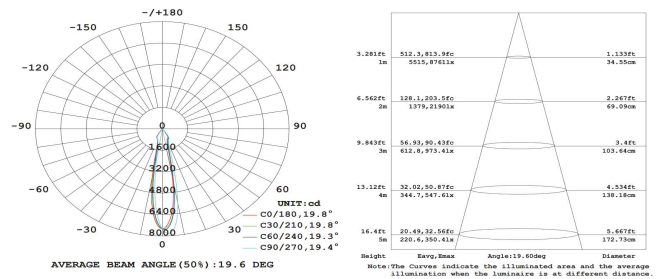


Model	Size	Step	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-TL002030	130x250x90mm	2*3*4	30W	24°/36°	>0.90	>80/90	No	90-350VAC	2700LM



- △ High end no screw design double arms COB LED track light series.
- △ High purity lathe aluminum body, plug-in-box driver, without screw.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ Professional optical lens with reflector gives pure focusing beam.
- △ Smoothing and comfortable appearance, 2,3 and 4 steps optional.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(luminous intensity and lux distribution diagrams)

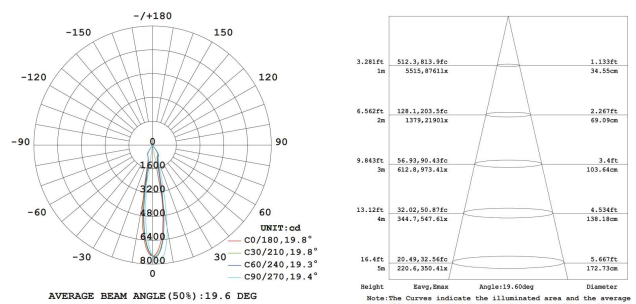

Model	Size	Step	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-TL003030	120x250x100mm	2*3*4	30W	24°/36°	>0.90	>80/90	No	90-350VAC	2700LM