



- △ Complete aluminum, solid and heavy body, powerful LED track light.
- △ High purity die casting aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ High quality designed optical reflector, beautiful light performance.
- △ Luxury appearance, aluminum driver box, 2,3 and 4 steps optional.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(luminous intensity and lux distribution diagrams)

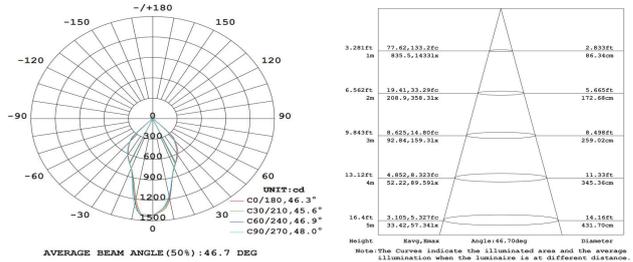


Model	Size	Step	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-TL006036	90x285x190mm	2*3*4	36W	24°/36°	>0.90	>80/90	No	90-350VAC	3350LM



- △ Higher power 50W COB LED track light for project lighting.
- △ High purity die casting aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ High quality designed optical reflector, beautiful light performance.
- △ Luxury appearance, big PC driver box, 2,3 and 4 steps optional.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(luminous intensity and lux distribution diagrams)

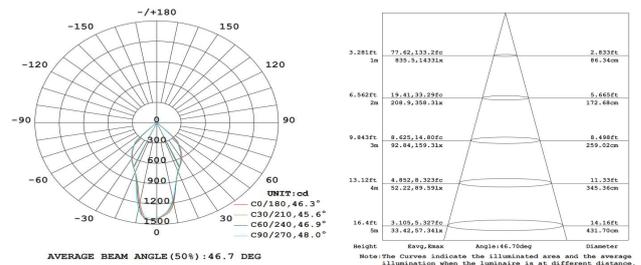

Model	Size	Step	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-TL007050	110x235x220mm	2*3*4	50W	24°/36°	>0.90	>80/90	No	90-350VAC	4500LM