



- △ Hotel used wall washer COB LED spot downlight 30W and 50W.
- △ High purity cool forging aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ High end optical anti-glare design brings comfortable light beam.
- △ High tempered transparent glass cover, efficient light transmission.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(30W luminous intensity and lux distribution diagrams)

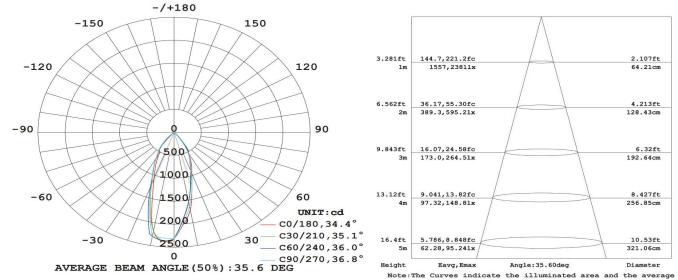


Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL011030	Ø160x170mm	Ø155mm	30W	36°/60°	>0.90	>80/90	No	90-350VAC	2700LM
CL-DL011050	Ø180x195mm	Ø160mm	50W	36°/60°	>0.90	>80/90	No	90-350VAC	4500LM



- △ Professional optical light for designer high end ceiling spotlight.
- △ High purity cool forging aluminum housing with fine paint finishing.
- △ Excellent ventilation to dissipate heat that ensures stable working.
- △ High end optical anti-glare design brings comfortable light beam.
- △ Reflector color can be electro plated silver or nickel for options.
- △ Bridgelux chips COB inside, high Ra>80/90, high lumen 150Lm/W.
- △ COB LED meets standards LM80 / EN62471 / RoHS / REACH144.
- △ High quality Isolated constant current driver, no flicker, high PF>0.90.
- △ LED driver meets standards CE / CB / TUV / BIS / CCC / SAA / FCC.
- △ Reliable quality and stable performance, low heat and low light decay.
- △ 50,000 hours life time, eco-friendly materials, up to 80% power saving.

(18W luminous intensity and lux distribution diagrams)

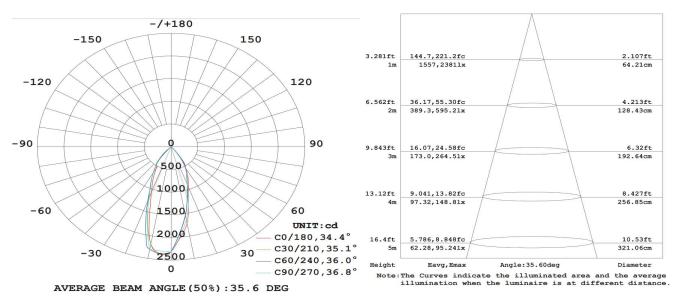

Model	Size	Cut Hole	Power	Beam Angle	PF	Ra	Flicker	Voltage	Lumen
CL-DL012006	Ø90x75mm	Ø75mm	6W	24°/36°	>0.90	>80/90	No	90-350VAC	550LM
CL-DL012012	Ø108x93mm	Ø90mm	12W	24°/36°	>0.90	>80/90	No	90-350VAC	1100LM
CL-DL012018	Ø140x106mm	Ø120mm	18W	24°/36°	>0.90	>80/90	No	90-350VAC	1650LM