



△ PPT housing, PC cover, aluminum heatsink,matt white body, E27 base. △ Brand 2835 SMD LED chip 130Lm/W, Ra>80, copper base, aluminum PCB. △ Individual constant current LED driver, no flickering, PF>0.6, 175-265VAC. △ Reliable quality and stable performance, low heat and low light decay. Δ 35,000 hours life time, eco-friendly materials and up to 80% power saving.

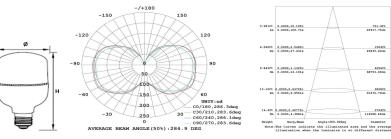

(20W luminous distribution and lux intensity diagrams)


PC cover, aluminum heatsink, matt white body, E27/E40 base. ID LED chip 130Lm/W, Ra>80, copper base, aluminum PCB. tant current LED driver, no flickering, PF>0.6, 175-265VAC. and stable performance, low heat and low light decay. △ 35,000 hours life time, eco-friendly materials and up to 80% power saving.

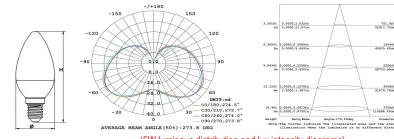

(5W luminous distribution and lux intensity diagrams)

△ PPT housing, PC cover, aluminum heatsink,matt white body, E14/E27 base. △ Brand 2835 SMD LED chip 130Lm/W, Ra>80, copper base, aluminum PCB. △ Individual constant current LED driver, no flickering, PF>0.6, 175-265VAC. △ Reliable quality and stable performance, low heat and low light decay.

 Δ 35,000 hours life time, eco-friendly materials and up to 80% power saving.

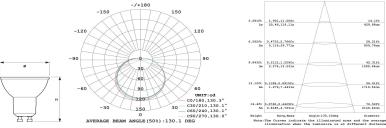



△ PPT housing, PC cover, aluminum heatsink,matt white body, GU10/MR16 base. △ Brand 2835 SMD LED chip 130Lm/W, Ra>80, copper base, aluminum PCB. △ Individual constant current LED driver, no flickering, PF>0.6, 175-265VAC. △ Reliable quality and stable performance, low heat and low light decay. △ 35,000 hours life time, eco-friendly materials and up to 80% power saving.

INFO@COOLUX.NET

SHARP OSRAM



CE ROHS


Size

Power


5W







CRE



Lumen

480Lm



XII

Model

XLL-BL003005 Ø37x107mm

XLL	CE VRo H			
Model	Size	Power	Lumen	\triangle PPT housing, PC
XLL-BL002020	Ø80x145mm	20W	1900Lm	Δ Brand 2835 SME
XLL-BL002030	Ø100x175mm	30W	2750Lm	Δ Individual consta
XLL-BL002040	Ø120x205mm	40W	3500Lm	Δ Reliable quality a
XLL-BL002050	Ø140x235mm	50W	4250Lm	Δ 35,000 hours life